

Description







- > Tripod turnstiles are compact and cost-effective entrance/exit security solutions.
- The body is made of brushed stainless steel which is robust, rigid, anti-rust, waterproof and durable.
- It is ideal for both indoor and outdoor settings.
- It has standard relay signal, which can be integrated with any kind of third-party access control system (e.g.: RFID, Fingerprint and Biometric reader device).
- It has sufficient space, which can mount with any type of external device (e.g.: Display, Counter, Reader, Push button, Card collector, Coin insert, Barcode/QR reader, Wheel).
- In case of emergency, tripod turnstile horizontal arms will drop down automatically to allow free passage when power off.
- Anti-tailing function: only one person passes at one time.
- It is suitable for areas with general pedestrian traffic (e.g., Park, School, Factory, Library, Cinema, Gym).

We don't only offer turnstile gates

We offer full access control solutions




# DS104 multi-passage for people to pass





# Specification


Model No.  Type  Tripod turnstile  Brand  Daosafe  Certification  Compliance CE, RoHS  Communication  Dry contact, Relay signal, RS485  Framework Material  Dimension  1200 * 280 * 1000mm  Net Weight  50kg/pcs  Passage Width  550mm  Arm Height  500mm  Passing Direction  Single directional / Bi-directional  MCBF  5 million  Power Supply  AC220V/110V, 50/60Hz  Operation Voltage  24V DC  Power Consumption  Operation Temperature  -15 °C - 60 °C  Operation Humidity  0 ~ 95% (No freeze)  Working Environment  Indoor / Outdoor (shelter)  Flow Rate		
Brand Daosafe Certification Compliance CE, RoHS Communication Dry contact, Relay signal, RS485 Framework Material 304 stainless steel Dimension 1200 * 280 * 1000mm Net Weight 50kg/pcs Passage Width 550mm Arm Height 500mm Passing Direction Single directional / Bi-directional MCBF 5 million Power Supply AC220V/110V, 50/60Hz Operation Voltage 24V DC Power Consumption 20W Operation Temperature -15 °C - 60 °C Operation Humidity 0 ~ 95% (No freeze) Working Environment Indoor / Outdoor (shelter) Flow Rate 35-40 people per minute	Model No.	DS104
Certification Compliance CE, RoHS  Communication Dry contact, Relay signal, RS485  Framework Material 304 stainless steel  Dimension 1200 * 280 * 1000mm  Net Weight 50kg/pcs  Passage Width 550mm  Arm Height 500mm  Passing Direction Single directional / Bi-directional  MCBF 5 million  Power Supply AC220V/110V, 50/60Hz  Operation Voltage 24V DC  Power Consumption 20W  Operation Temperature -15 °C - 60 °C  Operation Humidity 0 ~ 95% (No freeze)  Working Environment Indoor / Outdoor (shelter)  Flow Rate 35-40 people per minute	Туре	Tripod turnstile
Communication Dry contact, Relay signal, RS485  Framework Material 304 stainless steel  Dimension 1200 * 280 * 1000mm  Net Weight 50kg/pcs  Passage Width 550mm  Arm Height 500mm  Passing Direction Single directional / Bi-directional  MCBF 5 million  Power Supply AC220V/110V, 50/60Hz  Operation Voltage 24V DC  Power Consumption 20W  Operation Temperature -15 °C - 60 °C  Operation Humidity 0 ~ 95% (No freeze)  Working Environment Indoor / Outdoor (shelter)  Flow Rate 35-40 people per minute	Brand	Daosafe
Framework Material  Dimension  1200 * 280 * 1000mm  Net Weight  50kg/pcs  Passage Width  550mm  Arm Height  500mm  Passing Direction  Single directional / Bi-directional  MCBF  5 million  Power Supply  AC220V/110V, 50/60Hz  Operation Voltage  24V DC  Power Consumption  20W  Operation Temperature  -15 °C - 60 °C  Operation Humidity  0 ~ 95% (No freeze)  Working Environment  Indoor / Outdoor (shelter)  Flow Rate  35-40 people per minute	Certification	Compliance CE, RoHS
Dimension 1200 * 280 * 1000mm  Net Weight 50kg/pcs  Passage Width 550mm  Arm Height 500mm  Passing Direction Single directional / Bi-directional  MCBF 5 million  Power Supply AC220V/110V, 50/60Hz  Operation Voltage 24V DC  Power Consumption 20W  Operation Temperature -15 °C - 60 °C  Operation Humidity 0 ~ 95% (No freeze)  Working Environment Indoor / Outdoor (shelter)  Flow Rate 35-40 people per minute	Communication	Dry contact, Relay signal, RS485
Net Weight 50kg/pcs  Passage Width 550mm  Arm Height 500mm  Passing Direction Single directional / Bi-directional  MCBF 5 million  Power Supply AC220V/110V, 50/60Hz  Operation Voltage 24V DC  Power Consumption 20W  Operation Temperature -15 °C - 60 °C  Operation Humidity 0 ~ 95% (No freeze)  Working Environment Indoor / Outdoor (shelter)  Flow Rate 35-40 people per minute	Framework Material	304 stainless steel
Passage Width  Arm Height  500mm  Passing Direction  Single directional / Bi-directional  MCBF  5 million  Power Supply  AC220V/110V, 50/60Hz  Operation Voltage  24V DC  Power Consumption  20W  Operation Temperature  -15 °C - 60 °C  Operation Humidity  0 ~ 95% (No freeze)  Working Environment  Indoor / Outdoor (shelter)  Flow Rate	Dimension	1200 * 280 * 1000mm
Arm Height 500mm  Passing Direction Single directional / Bi-directional  MCBF 5 million  Power Supply AC220V/110V, 50/60Hz  Operation Voltage 24V DC  Power Consumption 20W  Operation Temperature -15 °C - 60 °C  Operation Humidity 0 ~ 95% (No freeze)  Working Environment Indoor / Outdoor (shelter)  Flow Rate 35-40 people per minute	Net Weight	50kg/pcs
Passing Direction  Single directional / Bi-directional  MCBF  5 million  Power Supply  AC220V/110V, 50/60Hz  Operation Voltage  24V DC  Power Consumption  20W  Operation Temperature  -15 °C - 60 °C  Operation Humidity  0 ~ 95% (No freeze)  Working Environment  Indoor / Outdoor (shelter)  Flow Rate	Passage Width	550mm
MCBF 5 million  Power Supply AC220V/110V, 50/60Hz  Operation Voltage 24V DC  Power Consumption 20W  Operation Temperature -15 °C - 60 °C  Operation Humidity 0 ~ 95% (No freeze)  Working Environment Indoor / Outdoor (shelter)  Flow Rate 35–40 people per minute	Arm Height	500mm
Power Supply  AC220V/110V, 50/60Hz  Operation Voltage  24V DC  Power Consumption  20W  Operation Temperature  -15 °C - 60 °C  Operation Humidity  0 ~ 95% (No freeze)  Working Environment  Indoor / Outdoor (shelter)  Flow Rate  35-40 people per minute	Passing Direction	Single directional / Bi-directional
Operation Voltage  24V DC  Power Consumption  20W  Operation Temperature  -15 °C - 60 °C  Operation Humidity  0 ~ 95% (No freeze)  Working Environment  Indoor / Outdoor (shelter)  Flow Rate  35–40 people per minute	MCBF	5 million
Power Consumption  20W  Operation Temperature  -15 °C - 60 °C  Operation Humidity  0 ~ 95% (No freeze)  Working Environment  Indoor / Outdoor (shelter)  Flow Rate  35–40 people per minute	Power Supply	AC220V/110V, 50/60Hz
Operation Temperature -15 °C - 60 °C  Operation Humidity 0 ~ 95% (No freeze)  Working Environment Indoor / Outdoor (shelter)  Flow Rate 35-40 people per minute	Operation Voltage	24V DC
Operation Humidity 0 ~ 95% (No freeze)  Working Environment Indoor / Outdoor (shelter)  Flow Rate 35–40 people per minute	Power Consumption	20W
Working Environment Indoor / Outdoor (shelter)  Flow Rate 35–40 people per minute	Operation Temperature	−15 °C − 60 °C
Flow Rate 35–40 people per minute	Operation Humidity	0 ~ 95% (No freeze)
	Working Environment	Indoor / Outdoor (shelter)
	Flow Rate	35–40 people per minute
LED Indicator LED indicators on top: green → entry. red × no entry	LED Indicator	LED indicators on top: green $\rightarrow$ entry. red $\times$ no entry
Emergency Automatic arm open when power off	Emergency	Automatic arm open when power off

# Dimension



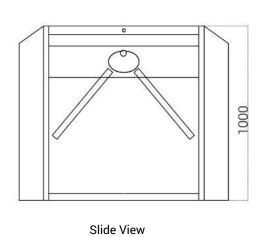

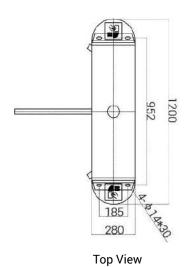

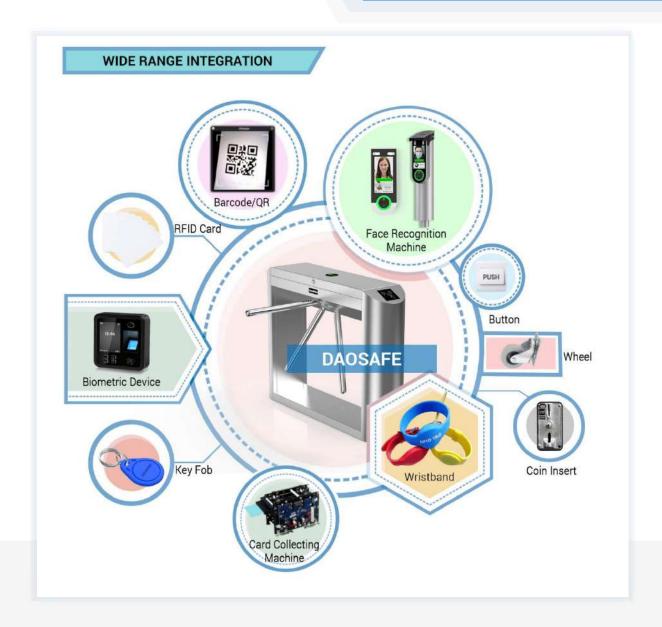

## Face Recognition

Dynamic face recognizes, non-contact and trendy solutions

### Barcode /QR scanner

Connect with mini PC or access controller to use Support phone or paper Barcode/QR

#### RFID Card

All kinds of RFID card reader, such as

Mifare, EM cards, HID card, Key Fob, Wristband...

# Biometric Device

Support Fingerprint, RFID card, password

Popular and secure access control solutions

## Key Fob

RFID type, mainly use in apartment

#### Card Collector Machine

The solution is mainly used in park, building for visitor

#### Wristband

RFID type, mainly used in swing pool and gym

#### Coin Insert

The solution is mainly for bus stations or toilet

#### Wheel

Integrated on turnstile for movable and portable


# Button

Exit by freely passing/ push button

#### 3rd Party Access Controller

Any 3rd party access controller can integrate with all our turnstiles

# System Integration Figure

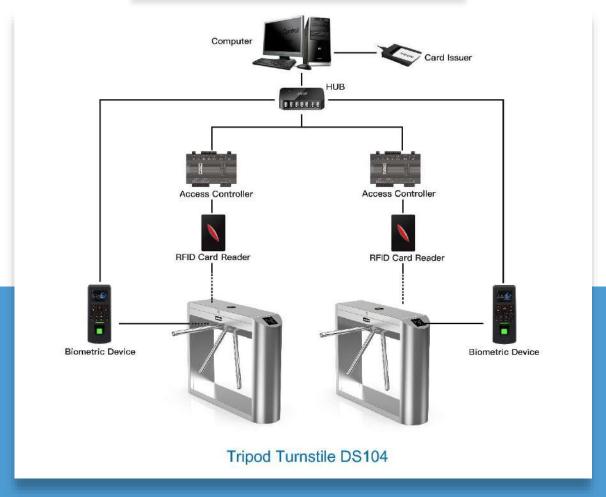

## **REMARK:**

- The turnstile circuit board support to work with any relay signal, and support to integrated with any 3rd party access control system: RFID, BIOMETRIC, QR/BARCODE and so on.
- Multiple access controller board can be connected by TCP/IP through network cable, control by central computer.
- The turnstile circuit board is also with RS232 output, it can connect with mini PC. Turnstile will open once
  received simple code by computer, which is suitable for the complicated like ticketing system solution.

The most obvious feature of tripod turnstile is only one person can pass at a time, to avoid illegal tracking.







One Lane Two Lanes Three Lanes

Daosafe Technology Co., Ltd. TEL: +86 755 21017409 EMAIL: info@daosafe.com WEB: http://www.daosafe.com